

335 / 340 / 345 / 350

GH350M10T-B44HST

~38% transparent area





Tier 1



15 Years Product Warranty

30 Years Peak Power Warranty

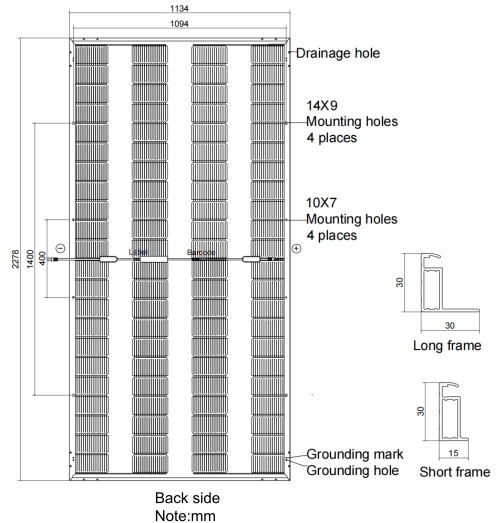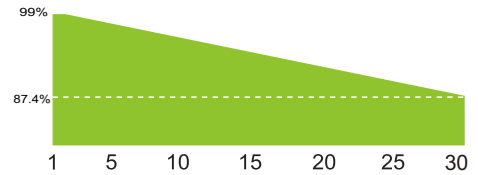

Electrical Specifications at STC				
Maximum Power (Pmax/W)	335	340	345	350
Maximum Power Current (Imp/A)	13.02	13.09	13.16	13.23
Maximum Power Voltage (Vmp/V)	25.78	26.03	26.26	26.51
Short-circuit Current (Isc/A)	13.73	13.78	13.83	13.88
Open-circuit Voltage (Voc/V)	31.03	31.22	31.41	31.60
Module Efficiency (%)	12.97%	13.16%	13.36%	13.55%
STC:AM1.5 1000W/m ² 25°C Measurement uncertainty:±3%				

Mechanical Data	
Cell Type	N type Mono-crystalline
Cell Arrangement	88(4x22)
Module Dimensions	2278*1134*30mm
Weight	31.6kg
Module Structure	Glass/Encapsulant/Glass
Glass Thickness	2.0mm+2.0mm
Safety Class	Class II
Junction Box Rating	IP68
Cables	4mm ² /(+)60mm;(-)300mm or Customized
Connector Type	PV-ZH202B or MC4-EVO 2A (1500V)

Packaging	
Pallet Dimensions	2320*1140*1250mm
Container	40'HQ
Pieces per Pallet	36
Pieces per Container	720

Temperature Characteristics	
Nominal Operating Cell Temperature	45±2°C
Temperature Coefficient of Isc	+0.038%/°C
Temperature Coefficient of Voc	-0.26%/°C
Temperature Coefficient of Pmax	-0.31%/°C

Maximum Ratings			
Operating Temperature	-40°C to+85°C	Maximum Series Fuse Rating	30A
Maximum Load Capacity	Snow 5400Pa/Wind 2400Pa	Number of Diodes	2
Maximum System Voltage	1500V DC(IEC)		

Statement: DMEGC reserve the right optimize the above data from time to time.

Ver:20230823A1