

360 / 365 / 370 / 375

GH375M10T-B48HST

~33% transparent area





Tier 1



15 Years Product Warranty

30 Years Peak Power Warranty

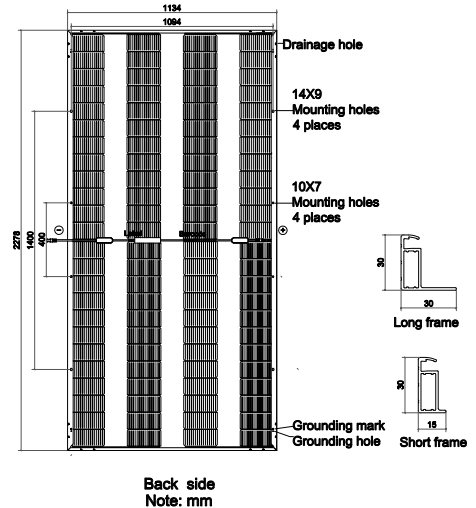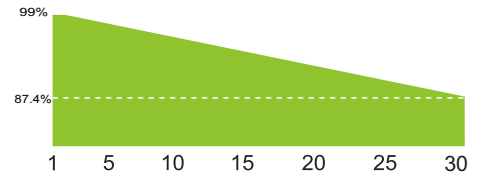

Electrical Specifications at STC

	360	365	370	375
Maximum Power (Pmax/W)	360	365	370	375
Maximum Power Current (Imp/A)	13.00	13.07	13.14	13.20
Maximum Power Voltage (Vmp/V)	28.05	28.25	28.45	28.65
Short-circuit Current (Isc/A)	13.68	13.73	13.78	13.83
Open-circuit Voltage (Voc/V)	33.74	33.93	34.12	34.31
Module Efficiency (%)	13.94%	14.13%	14.32%	14.52%

STC:AM1.5 1000W/m² 25°C Measurement uncertainty:±3%

Mechanical Data	
Cell Type	N type Mono-crystalline
Cell Arrangement	96(4x24)
Module Dimensions	2278x1134x30mm
Weight	31.6kg
Module Structure	Glass/Encapsulant/Glass
Glass Thickness	2.0mm+2.0mm
Safety Class	Class II
Junction Box Rating	IP68
Cables	4mm ² (+)-60mm;(-)-300mm or Customized
Connector Type	PV-ZH202B

Packaging	
Pallet Dimensions	2320×1140×1250mm
Container	40'HQ
Pieces per Pallet	36
Pieces per Container	720

Temperature Characteristics	
Nominal Operating Cell Temperature	45±2°C
Temperature Coefficient of Isc	+0.038%/°C
Temperature Coefficient of Voc	-0.26%/°C
Temperature Coefficient of Pmax	-0.31%/°C

Maximum Ratings			
Operating Temperature	-40°C to+85°C	Maximum Series Fuse Rating	30A
Maximum Load Capacity	Snow 5400Pa/Wind 2400Pa	Number of Diodes	2
Maximum System Voltage	1500V DC(IEC)		

Statement: DMEGC reserve the right optimize the above data from time to time.

Ver:20230823A1