

320 / 325 / 330 / 335

GH335M10-B44HST-C

33% transparent area





Tier 1



15 Years Product Warranty

30 Years Peak Power Warranty

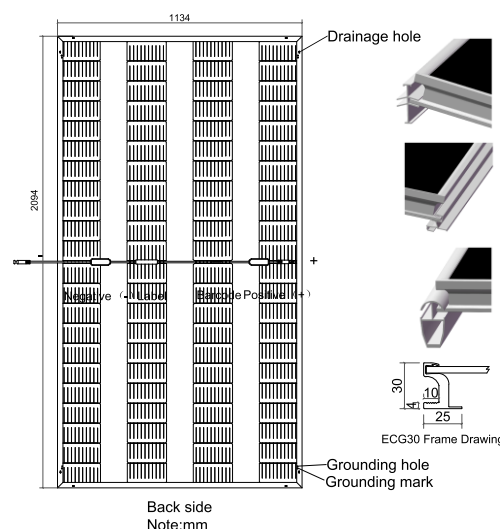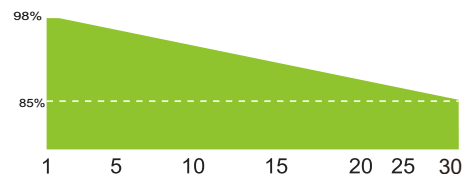

Electrical Specifications at STC

Maximum Power (Pmax/W)	320	325	330	335
Maximum Power Current (Imp/A)	12.80	12.91	13.00	13.10
Maximum Power Voltage (Vmp/V)	25.01	25.20	25.40	25.60
Short-circuit Current (Isc/A)	13.34	13.55	13.75	13.96
Open-circuit Voltage (Voc/V)	30.25	30.37	30.49	30.60
Module Efficiency (%)	13.48%	13.69%	13.90%	14.11%

STC:AM1.5 1000W/m² 25°C Measurement uncertainty:±3%

Mechanical Data

Cell Type	P type Mono-crystalline
Cell Arrangement	88(4x22)
Module Dimensions	2094*1134*30mm
Weight	30kg
Module Structure	Glass/Encapsulant/Glass
Glass Thickness	2.0mm+2.0mm
Safety Class	Class II
Junction Box Rating	IP68
Cables	4mm ² /(+)60mm;(-)300mm or Customized
Connector Type	PV-ZH202B or MC4-EVO 2A (1500V)

Packaging

Pallet Dimensions	2145*1140*1250mm
Container	40'HQ
Pieces per Pallet	36
Pieces per Container	792

Temperature Characteristics

Nominal Operating Cell Temperature	42±3°C
Temperature Coefficient of Isc	+0.063%/°C
Temperature Coefficient of Voc	-0.269%/°C
Temperature Coefficient of Pmax	-0.335%/°C

Maximum Ratings

Operating Temperature	-40°C to+85°C	Maximum Series Fuse Rating	30A
Maximum Load Capacity	Snow 5400Pa/Wind 2400Pa	Number of Diodes	2
Maximum System Voltage	1500V DC(IEC)		

Statement: DMEGC reserve the right optimize the above data from time to time.

Ver:20230516A1